


## IFL7.01

### 100x75mm Single Action Spring Hinges

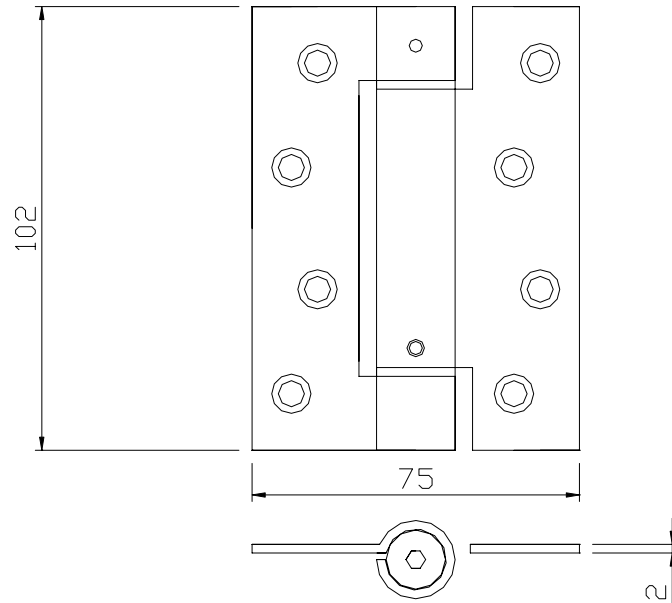

- 100x75mm Single Action Spring Hinge
- 2mm thick
- 1.1/5 pair required per standard height door leaf
- Supplied un-sprung for ease of installation
- Supplied with tools required for cranking up spring
- Springing can be cranked up and adjusted whilst door leaf is fully fitted into frame.
- Adjustable spring power by altering position of holding pin
- Centre hinge can be left un-sprung if remaining two hinges have sufficient spring power to close the door leaf as required.
- Available in Polished Chrome, Polished Brass and Satin Chrome finishes
- Available square cornered, as illustrated, or rounded.
- Tested to over 150,000 cycles in-house, (ref. A1020)
- Included in fire test FD30, EN1634-1, (ref. Chilt/RF05046B, Chilt/A05146)