

# Loft Access Hatches

FD60 fire rated steel loft doors range available.

IFZ2.60 Drop down, FD60 fire rated, loft access hatch




Metal Door & Beaded Frame



### Description

The insulated, removable flush metal door is fitted with a continuous metal hinge, and is secured using a 3-point lock. Other lock types and safety chains are available upon request. The door tray is filled with 75mm Rockwool Insulation with a 'K' Value of 0.037 W/mK. This is a 1 Hour Fire Rated Access Panel which has been tested to B.S.476: Part 22:1987.

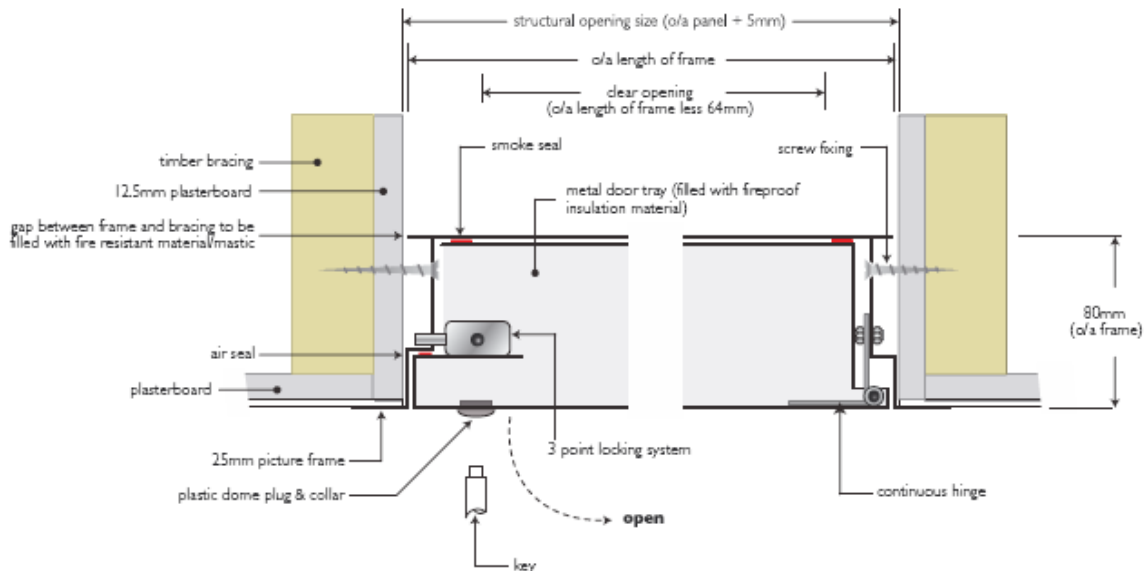

Code	Panel Size	Structural opening	Clear opening	Lockable
IFZ2.60	530x740mm	535x745mm	471x681mm	T-key budget lock
IFZ2.65	530x740mm	535x745mm	471x681mm	Euro Profile Cylinder Lock
IFZ2.70	555x655mm	560x660mm	496x596mm	T-key budget lock
IFZ2.75	555x655mm	560x660mm	496x596mm	Euro Profile Cylinder Lock

For samples or further technical information please contact our Sales Office on 01924-438112.