



ProSecure Enhanced Security Door Handle

Improved design.

Tested to the very latest
enhanced security standards.

Proven to be even stronger
than ever before.

Secured by Design



Police Preferred Specification



TM

KM535608

MILA

ProSecure Enhanced Security Door Handle

Our strongest handle yet.

The ProSecure enhanced security door handle is now even stronger. As part of Mila's on-going product development programme, we have updated the ProSecure door handle to withstand the rigorous techniques of today's test houses and to meet the very latest industry standards.

What's different?

On the underside of the external handle, we've reinforced where the lever meets the backplate with additional material. The handleset now features one spring cassette, on the internal handle, to provide consistent lever return to 90°. We've also supplied stronger, high tensile steel screws as standard.

Proven strength.

The ProSecure door handle has been tested to PAS24: 2016 for enhanced security, TS007 for enhanced security performance requirements, BSEN 1906: grade 4 for extreme durability and extreme corrosion resistance, is Secured by Design approved, 2 star Kitemarked accredited and is backed with a market-leading 10 year guarantee.

Intelligently designed. Inherently strong.



Anti-grip backplate shoulders

Chamfered design provides mole-grip resistance

Deep-drawn steel strength

Even stronger, deep-drawn steel backplate.
Designed for inherent strength

Force deflection technology

Cleverly concealed within the backplate for
Jemmy resistance

Anti-snap cylinder guard

Visibly raised within the backplate to protect the
cylinder from attack

Anti-drill disc

The rotating disc shields the cylinder face from
attack, preventing a drill bit from penetrating

High tensile steel screws

Supplied as standard to suit door thicknesses from
44mm - 70mm

Accredited

Secured by Design approved. Police preferred
specification. The SBD logo is laser etched onto the
external backplate to act as a visual deterrent

2 Star Kitemark accredited. The Kitemark is laser etched
onto the internal backplate for home owner peace of mind

Independently tested

At Exova to the enhanced security requirements of
PAS 24: 2016 and at BSI to the enhanced security
performance requirements of TS007: 2017 and A2: 2018 for
replacement cylinders and / or associated security hardware

Extreme tested

Independently tested to BSEN 1906: Grade 4 including a 100kg
lever pull test, for extreme durability and corrosion resistance

Community registered design: 1259998-0001

EU Patent: EP2580411B

Description	PZ	Backplate	Gold PVD	Polished Chrome	Smokey Chrome	Smooth Satin Chrome	White	Black
Lever/ Lever	92	240mm	050204N	050201N	050205N	050202N	050208N	050207N




KM535608



240mm Backplate

To ensure this handle fits your door please check that the following 3 measurements match your requirements:

1. The measurement from the centre of the handle lever to the centre of the keyhole known as the PZ distance - the PZ distance of this handle is 92mm
2. The distance between the centre of the top screw and the centre of the bottom screw - this distance on this handle is 211mm
3. The length of the handle backplate, top to bottom - this handle backplate is 240mm long

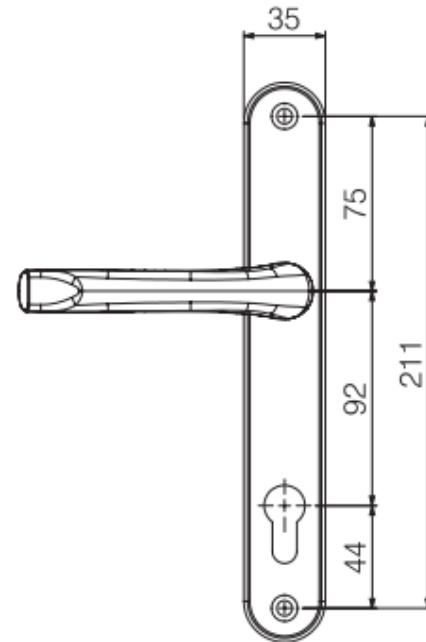

Fitting Instructions

Insert correct length spindle supplied (longest for PVCu, shortest for timber and composite) into the lever without screw fixing holes. Ensuring that the lever is held at 90°, slide the spindle through the lock mechanism from the external side of the door. The handle backplate should also fit over the cylinder lock.

The handle backplate with the two screw fixing holes should be placed on the inside of the door. Select the correct length screws supplied (longest for PVCu, shortest for timber and composite). Insert the two screws and screw together taking care not to overtighten.